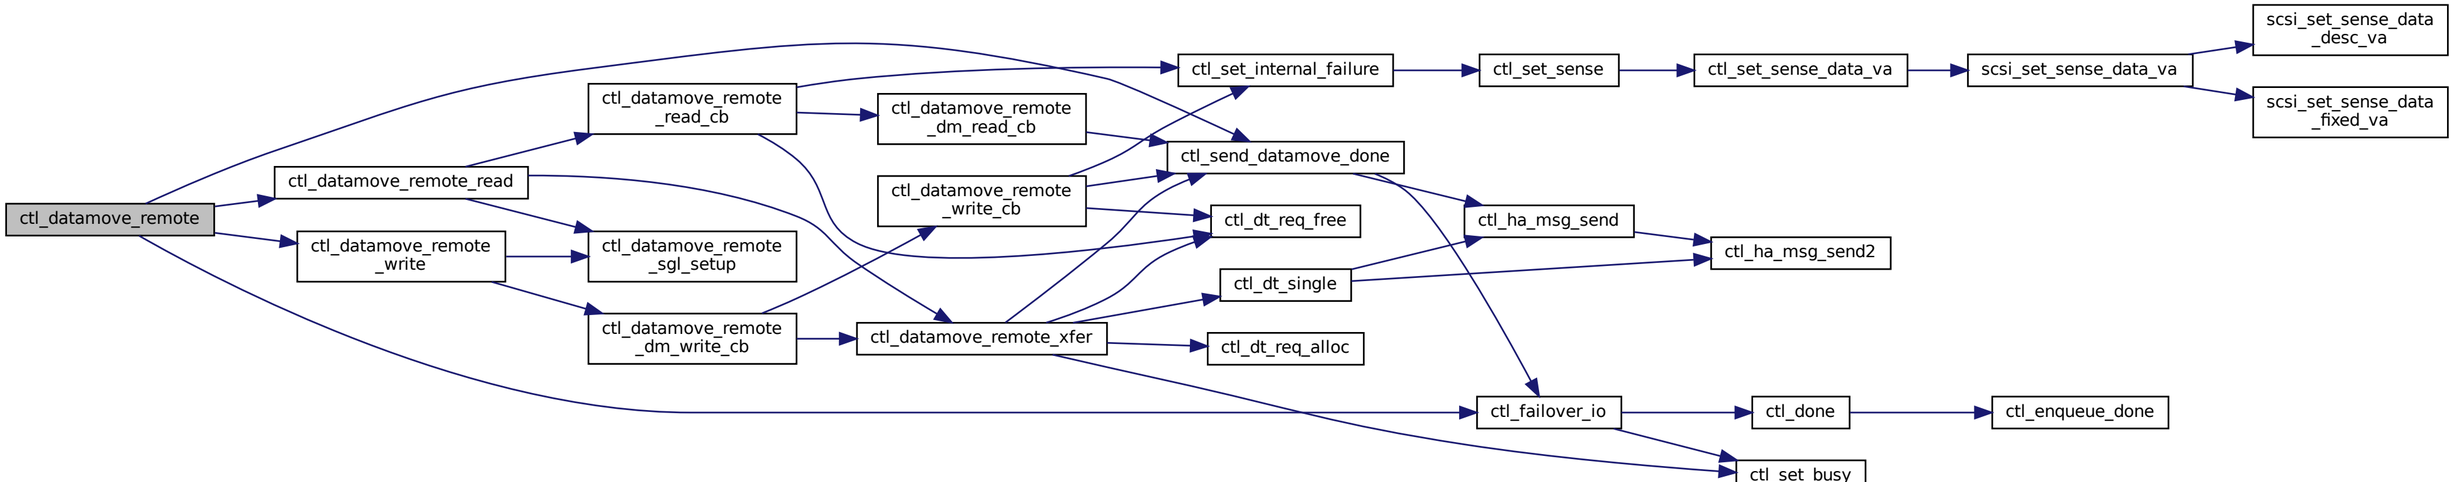
ctl_datamove_remote
ctl_datamove_remote_read
ctl_datamove_remote_write
ctl_datamove_remote_read_cb
ctl_datamove_remote_sgl_setup
ctl_datamove_remote_dm_write_cb
ctl_datamove_remote_dm_read_cb
ctl_datamove_remote_write_cb
ctl_datamove_remote_xfer
ctl_set_internal_failure
ctl_send_datamove_done
ctl_dt_req_free
ctl_dt_single
ctl_dt_req_alloc
ctl_ha_msg_send
ctl_ha_msg_send2
ctl_failover_io
ctl_set_busy
ctl_done
ctl_enqueue_done
ctl_set_sense
ctl_set_sense_data_va
scsi_set_sense_data_va
scsi_set_sense_data_desc_va
scsi_set_sense_data_fixed_va