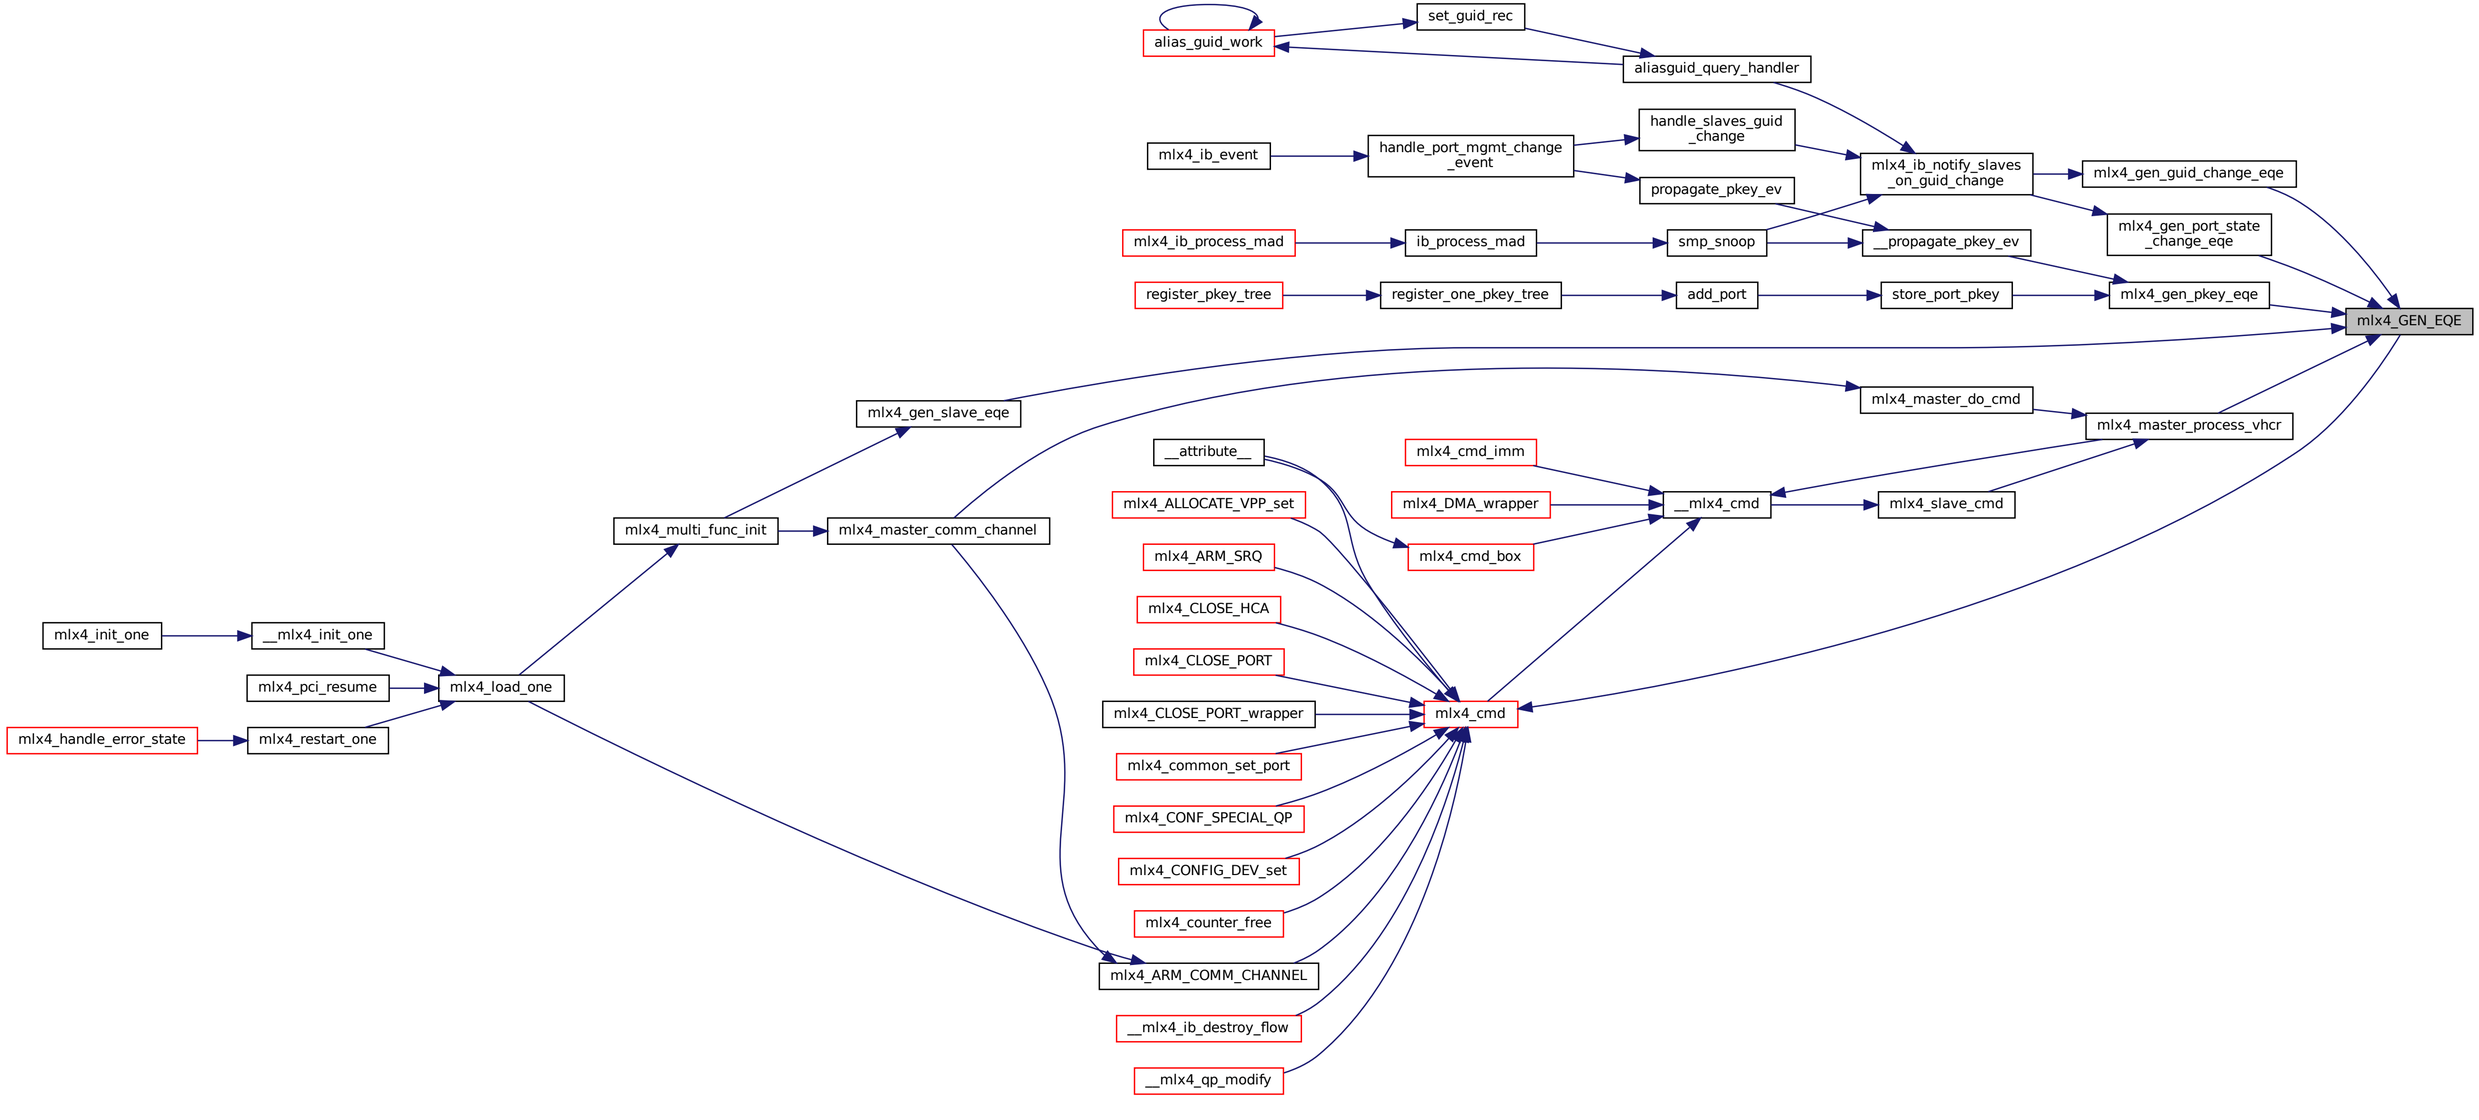
alias_guid_work
set_guid_rec
aliasguid_query_handler
mlx4_ib_event
handle_port_mgmt_change
_event
handle_slaves_guid
_change
propagate_pkey_ev
mlx4_ib_notify_slaves
_on_guid_change
mlx4_gen_guid_change_eqe
mlx4_gen_port_state
_change_eqe
mlx4_ib_process_mad
ib_process_mad
smp_snoop
__propagate_pkey_ev
register_pkey_tree
register_one_pkey_tree
add_port
store_port_pkey
mlx4_gen_pkey_eqe
mlx4_GEN_EQE
mlx4_gen_slave_eqe
mlx4_master_do_cmd
mlx4_master_process_vhcr
__attribute__
mlx4_cmd_imm
mlx4_ALLOCATE_VPP_set
mlx4_DMA_wrapper
__mlx4_cmd
mlx4_slave_cmd
mlx4_cmd_box
mlx4_multi_func_init
mlx4_master_comm_channel
mlx4_ARM_SRQ
mlx4_CLOSE_HCA
mlx4_init_one
__mlx4_init_one
mlx4_CLOSE_PORT
mlx4_pci_resume
mlx4_load_one
mlx4_CLOSE_PORT_wrapper
mlx4_cmd
mlx4_handle_error_state
mlx4_restart_one
mlx4_common_set_port
mlx4_CONF_SPECIAL_QP
mlx4_CONFIG_DEV_set
mlx4_counter_free
mlx4_ARM_COMM_CHANNEL
__mlx4_ib_destroy_flow
__mlx4_qp_modify